



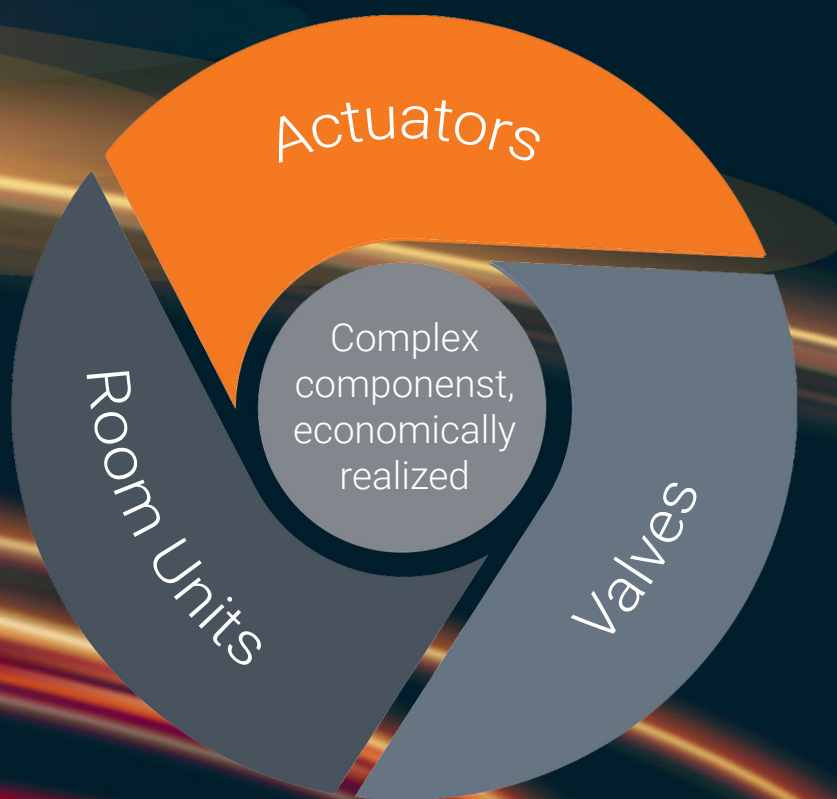
Based on our Competence and our strategic managed company, we strive to be the Partner of Choice for our customers.

Due to our Products and Performances, we are the strategic partner for reputable and sizeable companies in the HVAC markets.

Adapted on our Competence, we grow our profile and our brand name and accomplish a continuous Growth.








We aim to be a True Partner, we understand the needs of our customers and support them with our know-how.









Our solutions are always Customer Orientated.



PRODUCT CATALOGUE 2025

HVAC Actuators Non-Fail-Safe	6-8
HVAC Actuators Fail-Safe	9
Fire & Smoke Actuators	10-11
VAV Actuators	12
Characterized Control Valve (CCV) Small HVAC Equipment	13-16
Control Valve (CV) for HVAC Equipment	17-18
Pressure Independent Control Valve (PICV) for Small and large HVAC Equipment	19-20
Room Units	21
Accessories	22

Power Supply	Control	Torque	Running Time	Picture	Order Code	Feedback Signal	Auxiliary Switch	Electrical Connection	Shaft Coupling	IP Rating	Country of Origin
AC/DC 24V	2 / 3 Point	5Nm	60...120s		225-024T-05	n.a.	n.a.	Screw Terminals	□ 8-12 mm / ∅ 8-16 mm	IP52	Germany
					225-024T-05-S2		2x SPDT				
		8Nm	20s		227-024-08E	n.a.	n.a.	1m Cable	∅ 8-15 mm / ∅ 8-20 mm	IP54	Germany
					227-024-08E-S1		1x SPDT				
					227-024-08G		n.a.				
					227-024-08G-S1		1x SPDT				
					227-024-08I		n.a.				
					227-024-08I-S1		1x SPDT				
					227-024-08J		n.a.				
					227-024-08J-S1		1x SPDT				
		16Nm	75s		227-024-16H	n.a.	n.a.	1m Cable	∅ 8-15 mm / ∅ 8-20 mm	IP54	Germany
					227-024-16H-S1		1x SPDT				
					227-024-16I		n.a.				
					227-024-16I-S1		1x SPDT				
					227-024-16J		n.a.				
					227-024-16J-S1		1x SPDT				
		20Nm	150s		363-024-20	n.a.	n.a.	1m Cable	□ 9-18 mm / ∅ 9-26 mm	IP54	Germany
					363-024-20-S2		2x SPDT				
		30Nm	150s		363-024-30	n.a.	n.a.	1m Cable	□ 9-18 mm / ∅ 9-26 mm	IP54	Germany
					363-024-30-S2		2x SPDT				
		40Nm	150s		363-024-40	n.a.	n.a.	1m Cable	□ 9-18 mm / ∅ 9-26 mm	IP54	Germany
					363-024-40-S2		2x SPDT				
		60Nm	150s		363-024-60/8F14	n.a.	n.a.	1m Cable	Form fit □14mm	IP54	Germany
					363-024-60-S2/8F14		2x SPDT				

Power Supply	Control	Torque	Running Time	Picture	Order Code	Feedback Signal	Auxiliary Switch	Electrical Connection	Shaft Coupling	IP Rating	Country of Origin
AC/DC 24V	0(2)...10V	5Nm	60...120s		225C-024T-05	0(2)...10V	n.a.	Screw Terminals	ø8-12 mm / Ø 8-16 mm	IP52	Germany
					225C-024T-05-S2		2x SPDT				
		8Nm	20s		227C-024-08E	0(2)...10V	n.a.	1m Cable	ø 8-15 mm / Ø 8-20 mm	IP54	Germany
					227C-024-08E-S1		1x SPDT				
			20s		227C-024-08G		n.a.				
			60s		227C-024-08G-S1		1x SPDT				
			100s		227C-024-08I		n.a.				
			100s		227C-024-08I-S1		1x SPDT				
			120s		227C-024-08J		n.a.				
			120s		227C-024-08J-S1		1x SPDT				
		16Nm	75s		227C-024-16H	0(2)...10V	n.a.	1m Cable	ø 8-15 mm / Ø 8-20 mm	IP54	Germany
					227C-024-16H-S1		1x SPDT				
			100s		227C-024-16I		n.a.				
			100s		227C-024-16I-S1		1x SPDT				
			150s		227C-024-16J		n.a.				
			150s		227C-024-16J-S1		1x SPDT				
		20Nm	150s		363C-024-20	0(2)...10V	n.a.	1m Cable	ø9-18 mm / Ø 9-26 mm	IP54	Germany
					363C-024-20-S2		2x SPDT				
		30Nm	150s		363C-024-30	0(2)...10V	n.a.	1m Cable	ø9-18 mm / Ø 9-26 mm	IP54	Germany
					363C-024-30-S2		2x SPDT				
		40Nm	150s		363C-024-40	0(2)...10V	n.a.	1m Cable	ø9-18 mm / Ø 9-26 mm	IP54	Germany
					363C-024-40-S2		2x SPDT				
		60Nm	150s		363C-024-60/8F14	0(2)...10V	n.a.	1m Cable	Form fit ø14mm	IP54	Germany
		2Nm	1s		328CS-024-02A	0 (2)...10V	n.a.	1m Cable	ø8-15 mm / Ø 8-20 mm	IP54	Germany
		5Nm	2s		328CS-024-05B						
		10Nm	3s		328CS-024-10B						
		15Nm	3...5s		328CS-024-15B						

Power Supply	Control	Torque	Running Time	Picture	Order Code	Feedback Signal	Auxiliary Switch	Electrical Connection	Shaft Coupling	IP Rating	Country of Origin	
AC/DC 230V	2 / 3 Point	5Nm	60...120s		225-230T-05	n.a.	n.a.	Screw Terminals	ø8-12 mm / Ø 8-16 mm	IP52	Germany	
					225-230T-05-S2	n.a.	2x SPDT	Screw Terminals	ø8-12 mm / Ø 8-16 mm			
		8Nm	20s 60s 100s 120s		227-230-08E	n.a.	n.a.	1m Cable	ø 8-15 mm / Ø 8-20 mm	IP54	Germany	
					227-230-08E-S1		1x SPDT					
					227-230-08G		n.a.					
					227-230-08G-S1		1x SPDT					
					227-230-08I		n.a.					
					227-230-08I-S1		1x SPDT					
					227-230-08J		n.a.					
					227-230-08J-S1		1x SPDT					
		16Nm	75s 100s 150s		227-230-16H	n.a.	n.a.	1m Cable	ø 8-15 mm / Ø 8-20 mm	IP54	Germany	
					227-230-16H-S1		1x SPDT					
					227-230-16I		n.a.					
					227-230-16I-S1		1x SPDT					
					227-230-16J		n.a.					
					227-230-16J-S1		1x SPDT					
		20Nm	150s		363-230-20	n.a.	n.a.	1m Cable	ø9-18 mm / Ø 9-26 mm	IP54	Germany	
					363-230-20-S2		2x SPDT					
		30Nm	150s		363-230-30	n.a.	n.a.	1m Cable	ø9-18 mm / Ø 9-26 mm	IP54	Germany	
					363-230-30-S2		2x SPDT					
		40Nm	150s		363-230-40	n.a.	n.a.	1m Cable	ø9-18 mm / Ø 9-26 mm	IP54	Germany	
					363-230-40-S2		2x SPDT					
		60Nm	150s		363-230-60/8F14	n.a.	n.a.	1m Cable	Form fit ø14mm	IP54	Germany	
		0(2)...10V	8Nm	20s 60s 100s 120s		227C-230-08E	0 (2)...10V	n.a.	1m Cable	ø 8-15 mm / Ø 8-20 mm	IP54	Germany
						227C-230-08G						
						227C-230-08I						
						227C-230-08J						
			16Nm	75s 100s 150s		227C-230-16H	0 (2)...10V	n.a.	1m Cable	ø 8-15 mm / Ø 8-20 mm	IP54	Germany
227C-230-16I												
227C-230-16J												





Power Supply	Control	Torque	Running Time	Picture	Order Code	Feedback Signal	Auxiliary Switch	Electrical Connection	Shaft Coupling	IP Rating	Country of Origin	
AC/DC 24V	2 Point	3Nm	40/20s		341-024D-03	n.a.	n.a.	1m Cable	□8-13 mm / Ø 8-16.5 mm	IP54	Germany	
					341-024D-03-S2F		2x SPDT					
		5Nm	75/20s		341-024-05	n.a.	n.a.	1m Cable	□8-13 mm / Ø 8-16.5 mm			
					341-024-05-S2F		2x SPDT					
		10Nm	75/20s		361-024-10	n.a.	n.a.	1m Cable	□9-18 mm / Ø 9-26 mm			
					361-024-10-S2		2x SPDT					
		20Nm	75/20s		361-024-20	n.a.	n.a.	1m Cable	□9-18 mm / Ø 9-26 mm			
					361-024-20-S2		2x SPDT					
	0(2)...10V	2Nm	1/1s		328QS-024-02A	0 (2)...10V	n.a.	1m Cable	□8-15 mm / Ø 8-20 mm			
					328QS-024-05B							
					328QS-024-10B							
					328QS-024-15B							
	0(2)...10V	3Nm	100/20s		341C-024-03	0 (2)...10V	n.a.	1m Cable	□8-13 mm / Ø 8-16.5 mm			
					341C-024-03-S2F		2x SPDT					
		5Nm	100/20s		341C-024-05	0 (2)...10V	n.a.	1m Cable	□8-13 mm / Ø 8-16.5 mm			
					341C-024-05-S2F		2x SPDT					
		10Nm	150/20s		361C-024-10	0 (2)...10V	n.a.	1m Cable	□9-18 mm / Ø 9-26 mm			
					361C-024-10-S2		2x SPDT					
		20Nm	150/20s		361C-024-20	0 (2)...10V	n.a.	1m Cable	□9-18 mm / Ø 9-26 mm			
					361C-024-20-S2		2x SPDT					
	AC/DC 230V	2 Point	3Nm	40/20s		341-230D-03	n.a.	n.a.	1m Cable	□8-13 mm / Ø 8-16.5 mm	IP54	Germany
						341-230D-03-S2F		2x SPDT				
			5Nm	75/20s		341-230-05	n.a.	n.a.	1m Cable	□8-13 mm / Ø 8-16.5 mm		
						341-230-05-S2F		2x SPDT				
10Nm			75/20s		361-230-10	n.a.	n.a.	1m Cable	□9-18 mm / Ø 9-26 mm			
					361-230-10-S2		2x SPDT					
20Nm		75/20s		361-230-20	n.a.	n.a.	1m Cable	□9-18 mm / Ø 9-26 mm				
				361-230-20-S2		2x SPDT						

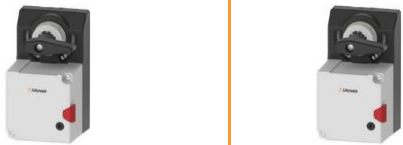

Power Supply	Control	Torque	Running Time	Picture	Order Code	Feedback Signal	Auxiliary Switch	Electrical Connection	Shaft Coupling	IP Rating	Country of Origin		
AC/DC 24V	2 Point	3Nm	40/20s		340-024D-03-S2/8F12	n.a.	2x SPDT	1m Cable	Form fit 12mm	IP54	Germany		
		5Nm	75/20s		340-024-05/8F12		n.a.						
					340-024-05-S2/8F12		2x SPDT						
		12Nm	75/20s		360-024-12/8F12		n.a.						
					360-024-12-S2/8F12		2x SPDT						
			20Nm		360-024-20-S2/8F12								
			3Nm	40/20s			340TA-024D-03-S2/8F12					2x SPDT	
			5Nm	75/20s			340TA-024-05-S2/8F12						
		12Nm	75/20s		360TA-024-12-S2/8F12								
		20Nm	75/20s		360TA-024-20-S2/8F12								
	0(2)...10V	5Nm	75/20s		340C-024-05-S2/8F12	0(2)...10V	2x SPDT	1m Cable	Form fit 12mm	IP54	Germany		
		12Nm	75/20s		360C-024-12-S2/8F12*								
	2 Point	5Nm	30/10s		UL-340S-024-045-S2/RE16	n.a.	2x SPDT	1m Cable	Form fit 12mm	IP54	Germany		
		10Nm	75/10s		UL-360S-024-090-S2/RE25								
		15Nm	75/10s		UL-360S-024-135-S2/RE25								
	AC/DC 230V	2 Point	3Nm	40/20s		340-230D-03-S2/8F12	n.a.	2x SPDT	1m Cable	Form fit 12mm	IP54	Germany	
			5Nm	75/20s		340-230-05-S2/8F12							
			12Nm	75/20s		360-230-12-S2/8F12							
			20Nm	75/20s		360-230-20-S2/8F12							
				3Nm	40/20s								340TA-230D-03-S2/8F12
				5Nm	75/20s								340TA-230-05-S2/8F12
			12Nm	75/20s		360TA-230-12-S2/8F12							
			20Nm	75/20s		360TA-230-20-S2/8F12							
		5Nm	30/10s		UL-340S-230-045-S2/RE16	n.a.	2x SPDT	1m Cable	Form fit 12mm	IP54	Germany		
		10Nm	75/10s	UL-360S-230-090-S2/RE25									
		15Nm	75/10s	UL-360S-230-135-S2/RE25									




* Product by request


Power Supply	Control	Torque	Running Time	Picture	Order Code	Feedback Signal	Auxiliary Switch	Electrical Connection	Shaft Coupling	IP Rating	Country of Origin	
AC/DC 24V	2 Point	15Nm	30s		342-024-15-S2/8F12	n.a.	2x SPDT	1m Cable	Form fit 12mm	IP54	Germany	
		20Nm	60s		362-024-20-S2/8F12							
		40Nm			362-024-40-S2/8F12							
AC/DC 230V		2 Point	15Nm	30s		342-230-15-S2/8F12	n.a.	2x SPDT	1m Cable	Form fit 12mm	IP54	Germany
			20Nm	60s		362-230-20-S2/8F12						
			40Nm			362-230-40-S2/8F12						



Variable Air Volume Actuators / Non Fail-Safe






Power Supply	Control	Torque	Running Time	Picture	Order Code	Miscellaneous	Feedback Signal	IP Rating	Country of Origin
AC/DC 24V	0(2)...10V	8Nm	100s		327V-024-081	0...500Pa	0(2)...10V	IP42	Germany
					327VM-024-081	Display / 0...500Pa			
	0(2)...10V / RS485		100s		327V-024-081-MB	0...500Pa / Modbus RTU			
					327VM-024-081-MB	Display / 0...500Pa / Modbus RTU			
					327V-024-081-BN	0...500Pa / BACnet MSTP			
					327VM-024-081-BN	Display / 0...500Pa / BACnet MSTP			
AC/DC 24V	0(2)...10V	16Nm	100s		327V-024-161	0...500Pa	0(2)...10V	IP42	Germany
					327VM-024-161	Display / 0...500Pa			
	0(2)...10V / RS485		100s		327V-024-161-MB	0...500Pa / Modbus RTU			
					327VM-024-161-MB	Display / 0...500Pa / Modbus RTU			
					327V-024-161-BN	0...500Pa / BACnet MSTP			
					327VM-024-161-BN	Display / 0...500Pa / BACnet MSPT			




Characterized Control Valve (CCV) / Small HVAC Equipment										Actuators											
Characteristic	Valve Size	Operational Pressure	Picture	Order Code	KV's Value (m ³ /h)	Differential Pressure, max. (kPa)	Fluid Temperature, max	Material	Country of Origin	Open Close Actuators						Modulating Actuators					
										Non Spring Return Actuators											
										Picture											
										Country of origin											
										Power Supply											
										IP Rating											
										Running Time (s)											
										Auxiliary switch											
										Torque (Nm)											
										Order Code											
Close-Off pressure, max (KPa)																					
3 - Way Valve	DN15 DN20 DN25 DN32 DN40 DN50	PN20		V3FA.15_1	1	350	5...90°C	Brass	China	1600						1600					
				V3FA.15_1.6	1.6					1600						1600					
				V3FA.15_2.5	2.5					1600						1600					
				V3FA.15_4	4					1600						1600					
				V3FA.20_4	4					1600						1600					
				V3FA.20_6.3	6.3					1600						1600					
				V3FA.25_10	10					1600						1600					
				V3FA.25_16	16					1600						1600					
				V3FA.32_16	16					1600						1600					
				V3FA.32_25	25					1600						1600					
				V3FA.40_25	25					1600						1600					
				V3FA.40_40	40					1600						1600					
				V3FA.50_40	40					1600						1600					
				V3FA.50_63	63					1600						1600					












Characterized Control Valve (CCV) / Small HVAC Equipment										Actuators					
Characteristic	Valve Size	Operational Pressure	Picture	Order Code	KVs Value (m ³ /h)	Differential Pressure, max. (kPa)	Fluid Temperature, max	Material	Country of Origin	Open Close Actuators		Modulating Actuators			
										Spring Return Actuators					
										Picture					
										Country of origin		Germany			
										Power Supply		24V AC/DC			
										IP Rating		IP54			
										Running Time (s)		75/20	100/20		
										Auxiliary switch		n.a.	x2	n.a.	x2
										Torque (Nm)		5	5	5	5
										Order Code		341-024-05_VNB	341-024-05-S2F_VNB	341C-024-05_VNB	341C-024-05-S2F_VNB
				Close-Off pressure, max (KPa)											
3 - Way Valve	DN15 DN20 DN25 DN32 DN40 DN50	PN20		V3FA.15_1	1	350	5... 0°C	Bra ss	Ch na	1600	1600	1600	1600		
				V3FA.15_1.6	1.6					1600	1600	1600	1600		
				V3FA.15_2.5	2.5					1600	1600	1600	1600		
				V3FA.15_4	4					1600	1600	1600	1600		
				V3FA.20_4	4					1600	1600	1600	1600		
				V3FA.20_6.3	6.3					1600	1600	1600	1600		
				V3FA.25_10	10					1600	1600	1600	1600		
				V3FA.25_16	16					1600	1600	1600	1600		
				V3FA.32_16	16					1600	1600	1600	1600		
				V3FA.32_25	25					1600	1600	1600	1600		
				V3FA.40_25	25										
				V3FA.40_40	40										
				V3FA.50_40	40										
				V3FA.50_63	63										

Control Valve (CV) for HVAC Equipment										Actuators				
Characteristic	Valve Size	Thread	Operational Pressure	Picture	Order Code	KV's Value (m³/h)	Leakage Rate	Fluid Temperature, max	Stroke (mm)	Country of Origin	Fail Safe function	Open/Close & Modulating Actuators		
											Non Fail Safe	Picture		
2 - Way Valve	DN15	DN15	Screw Flanged ISO7005-2		V2SBP.15_4	4	0.02% of KV's Value	-25...130°C	20	China	Fail Safe	Close-Off pressure, max (MPa)		
	DN20	DN20			V2SBP.20_6.3	6.3						1.60		
	DN25	DN25			V2SBP.25_10	10						1.60		
	DN32	DN32			V2SBP.32_16	16						1.60		
	DN40	DN40			V2SBP.40_25	25						1.00		
	DN50	DN50			V2SBP.50_40	40						0.70		
	DN65	DN65			V2SAP.65_63	63						0.50		
	DN80	DN80			V2SAP.80_100	100						1.00		
	DN100	DN100			V2SAP.100_160	160						1.00		
	DN125	DN125			V2SAP.125_250	250						1.00		
	DN150	DN150			V2SAP.150_350	350						1.60		











Control Valve (CV) for HVAC Equipment										Actuators		
Characteristic	Valve Size	Thread	Operational Pressure	Picture	Order Code	KVs Value (m³/h)	Leakage Rate	Fluid Temperature, max	Stroke (mm)	Country of Origin	Open/Close & Modulating Actuators	
											Fail Safe function	Non Fail Safe
												
											China	
											24V AC/DC	
											IP54	
											2 - 4 s/mm	1 - 2s/mm
											0...10V / 4...20mA	
											30	50
											1000	3000
											160C-024-100	180C-024-300
											Close-Off pressure, max (MPa)	
3 - Way Valve	DN15	Screw Flanged ISO7005-2	PN25		V3SBP.15_4	4	0.02% of KVs Value	-5...130°C	20	China	1.60	
	DN20				V3SBP.20_6.3	6.3					1.60	
	DN25				V3SBP.25_10	10					1.60	
	DN32				V3SBP.32_16	16					1.00	
	DN40				V3SBP.40_25	25					0.70	
	DN50				V3SBP.50_40	40					0.50	
	DN65	Screw Flanged ISO7005-2	PN16		V3SAP.65_63	63			20		0.90	
	DN80				V3SAP.80_100	100			30		0.55	
	DN100				V3SAP.100_160	160					0.35	
	DN125				V3SAP.125_250	250			40		0.24	
	DN150				V3SAP.150_350	350					0.15	

Pressure Independent Control Valve (PICV) for Small HVAC Equipment										Actuators					
Characteristic	Valve Size	Operational Pressure	Picture	Order Code	Flow range (m³/h) / selectable	Differential Pressure, max. (kPa)	Fluid Temperature, max	Stroke (mm)	Country of Origin						
										Open Close Actuators		Modulating actuators			
										Picture					
										Country of origin	Germany			Germany	
										Power Supply	24V AC/DC	230V AC		24V AC/DC	
										IP Rating	IP54			IP54	
										Fail Safe function	Non FS	FS	FS	FS	Non FS
										Running Time(s)	120			120	
										Feedback signal	n.a.	n.a.	n.a.	n.a.	n.a.
										Stroke (mm)	4	4	4	4	4
Force (N)	125	100	125	100	125										
Order Code	120-024-0125	110-230-010	110-230-0125	110C-024-010	120C-024-0125										
Close-Off pressure, max (kPa)															
2- Way Valve	DN15	PN25		V2FBPIC.15_0.9	0.16...0.9	35-500	-10...120°C	4	China	400	400	400	400	400	
	DN20			V2FBPIC.20_1.3	0.28...1.3					400	400	400	400	400	
	DN25			V2FBPIC.25_2	0.21...2.0					400	400	400	400	400	
	DN32			V2FBPIC.32_4	0.42...4.0					130	130	130	130	130	
2- Way Valve - 2 Pressure Ports	DN15	PN25		V2FBPPIC.15_0.9	0.16...0.9	35-500	-10...120°C	4	China	400	400	400	400	400	
	DN20			V2FBPPIC.20_1.3	0.28...1.3					400	400	400	400	400	
	DN25			V2FBPPIC.25_2	0.21...2.0					400	400	400	400	400	
	DN32			V2FBPPIC.32_4	0.42...4.0					130	130	130	130	130	

Pressure Independent Control Valve (PICV) for Large HVAC Equipment										Actuators			
Characteristic	Valve Size	Operational Pressure	Picture	Order Code	Flow range (m³/h) / selectable	Differential Pressure, max. (kPa)	Fluid Temperature, max	Stroke (mm)	Country of Origin	Open/Close & Modulating Actuators			
										Picture	Country of origin	Power Supply	IP Rating
2- Way Valve	DN32	PN25		V2FBPIC.32_4L	4	35...500	-10...120°C	20	China	Close-Off pressure, max (kPa)			
	DN40			V2FBPIC.40_6L	6					400	400	400	400
	DN50			V2FBPIC.50_8L	8					400	400	400	400
2- Way Valve - 2 Pressure Ports	DN32	PN25		V2FBPPIC.32_4L	4	35...500	-10...120°C	20	China	Close-Off pressure, max (kPa)			
	DN40			V2FBPPIC.40_6L	6					400	400	400	400
	DN50			V2FBPPIC.50_8L	8					400	400	400	400
2- Way Valve - 2 Pressure Ports	DN50	PN16		V2SAPPIC.50_13	13	400	-10...120°C	20	China	Close-Off pressure, max (kPa)			
	DN65			V2SAPPIC.65_21	21					400	400	400	400
	DN80			V2SAPPIC.80_28	28					400	400	400	400
	DN100			V2SAPPIC.100_50	50			400		400	400	400	
	DN125			V2SAPPIC.125_90	90			400		400	400	400	
	DN150			V2SAPPIC.150_145	145			400		400	400	400	

Application	Power Supply	Communication	Housing	Picture	Order Code	2/4 Pipe FCU	Outputs /	Measuring Range	Accuracy	IP Rating	Country of Origin	
Fan Coil Controller	230V AC	BACnet	Flush Mount		CRF9-T-FC01B*	2/4 Pipe	230V / 3Steps 230V / 2xON/OFF Inputs 1x NTC10k N/O Contact	5-35°C	± 1°C	IP30	China	
					CRF9-T-FC03B*	2/4 Pipe	230V / 3Steps 2x0...10V Inputs 1x NTC10k N/O Contact					
		MODbus	Surface Mount		CRW9-T-FC01M	2/4 Pipe	230V / 3Steps 230V / 2xON/OFF Inputs 1x NTC10k N/O Contact					
					CRW9-T-FC03M	2/4 Pipe	230V / 3Steps 2x0...10V Inputs 1x NTC10k N/O Contact					
	24V AC	None	None	Surface Mount		CRW1-T-FC03	2/4 Pipe					230V / 3Steps 2x0...10V Inputs 1x NTC10k -----
						CRW1-T-FC04	2/4 Pipe					EC Fan 0...10V 230V / 2xON/OFF Inputs 1x NTC10k -----
	230V AC	None	None	Surface Mount		CRW1-T-FC01	2/4 Pipe					230V / 3Steps 230V / 2xON/OFF Inputs 1x NTC10k N/O Contact
						CRW1-T-FC05	2/4 Pipe					EC Fan 0...10V 230V / 2xON/OFF Inputs 1x NTC10k N/O Contact
						CRW1-T-FC06	2 Pipe					EC Fan 0...10V 1x0...10V Inputs 1x NTC10k N/O Contact
	24V AC	None	None	Flush Mount		CRF1-T-FC03	2 Pipe					230V/ 3Steps 1x0...10V Inputs 1x NTC10k N/O Contact
					CRF1-T-FC04	2/4 Pipe	EC Fan 0...10V 24V / 2xON/OFF Inputs 1x NTC10k N/O Contact					

* Product by request

Products Series	Picture	Order Code	Description	Quantity per package	County of Origin
227 / 327- Actuator Series		227/327-8E8	Form Fit inserts 8x8 mm	20 pieces	Germany
		227/327-8E10	Form Fit inserts 10x10 mm	20 pieces	
		227/327-8E12	Form Fit inserts 12x12 mm	20 pieces	
		227/327-ZS	Mounting Flange	10 pieces	
		227/327-Indicator	Position Indicators	20 pieces	
		227/327-Anti-Rotation	Anti- Rotation bar	20 pieces	China
		227/327-Clamp	Universal Clamp (Ø 8-20 mm / ◊ 8-15 mm)	10 pieces	Germany
327 VAV Compact Actuator		GUIV3-M	Interface for parametrizing VAV actuators - parameter can be set with or without PC - including all necessary connection cables	1 piece	Germany
		Win-VAV2-A-Bundle	Interface for parametrizing VAV actuators in connection with a PC - including all necessary connection cables	1 piece	Germany
340 / 360 Series		TAE-72	Thermoelectric tripping device - 24V AC/DC 72° Degree C trigger point - Status LED	1 piece	Germany
		TAE-92	Thermoelectric tripping device - 24V AC/DC 92° Degree C trigger point - Status LED	1 piece	

India

ThermoG Klima Technologie Pvt Ltd
📍 No.115/1, Industrial Suburb, 2nd Stage,
5th Main Road, Yeshwantpur,
Bengaluru-560022, Karnataka,
+91 80 23311813
+91 90084 77244

South Asia, Middle East & Africa

ThermoG MEA FZC
📍 SPC Free Zone , Sharjah , UAE
📍 708 , White Crown Tower ,
Sh Zayed Road, Dubai , UAE
+971 4 5703751
+971 50 5529227